


BiLite and MonoLite Illuminators



Each **AngioLaz** illuminator is a state-of-the-art system employing many unique features. The quick change module enables lamp exchange in less than 30 seconds. Our module contains a built-in easily viewed hour meter to ensure full use of the warranted lamp life. In addition to all these features, AngioLaz offers a rebate program for your lamp housing, further lowering the cost of operation.

These systems are prewired for video as an option. The video camera head (shown here with supplied opto-coupler and scope) plugs directly into the illuminator. Just attach a monitor to the back and you've got the picture! The unique self-contained camera is fully soakable for cold disinfection, and offers superb color image.

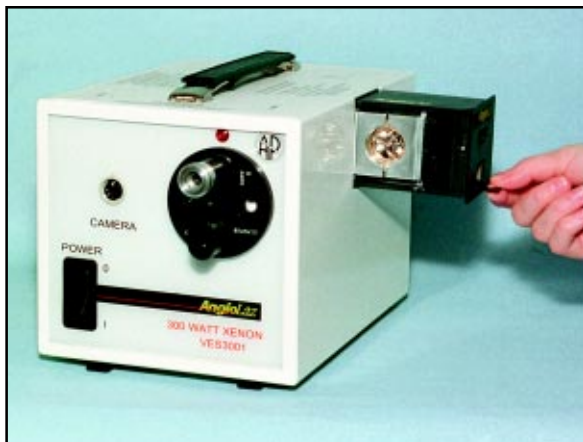

Specifications

Light Source	300 watt xenon compact arc pre-mounted in a special quick change module. Also available in 175 watt xenon upon special order.
Fiber-Optic Light Cable Connection	Designed for Storz, Olympus, Wolf/Dynonics and ACMI fiber-optic light guide cables. BiLite—dual turret connections; MonoLite—single turret connection
Light Attenuation	Individual manual shutters for each port
Video Connections (optional)	1-Y/C OUT and 1-Composite Video Out
Camera Connection	AngioLaz Type 1 Cameras
Physical Size	7" x 7.5" x 10.7" (18 x 19 x 27 cm)
Weight	11.7 lbs. with lamp
System Power Requirements	120 volts/6 amps or 220 volts/3 amps (50 or 60 Hz)
Construction	Painted and anodized aluminum

AngioLaz, Incorporated

800-340-9083 / fax 802-463-9228 / www.angiolaz.com
PO Box 556 / Industrial Park / Bellows Falls, VT 05101